


gripsport

Instructions













GS2 & GS2+

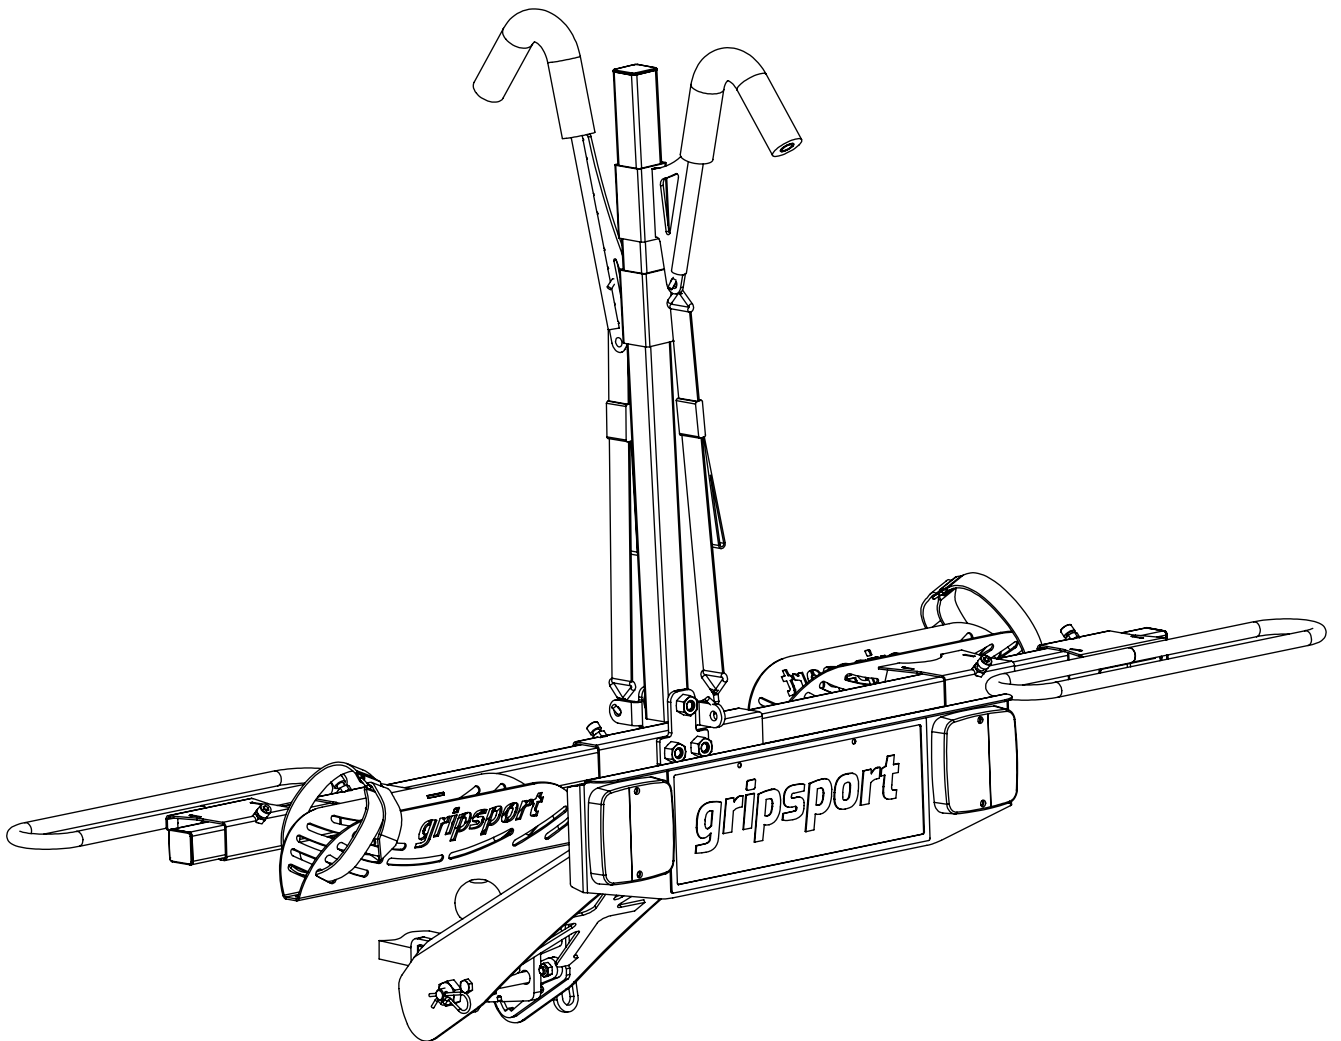

Max. 30kg , Per bike





Parts list

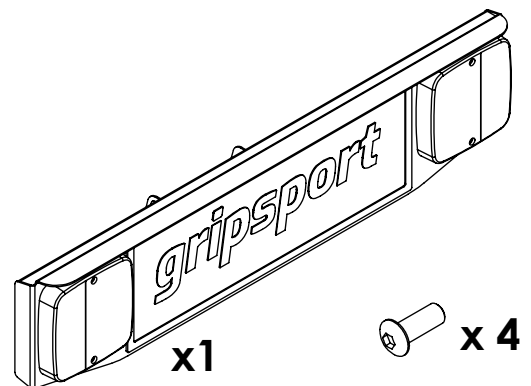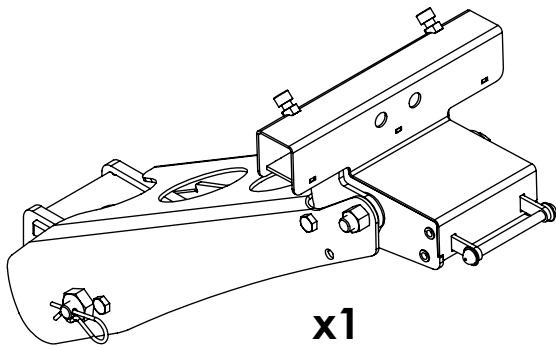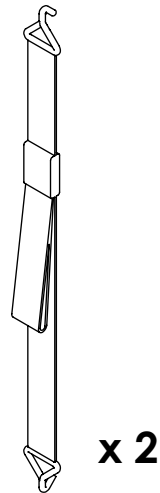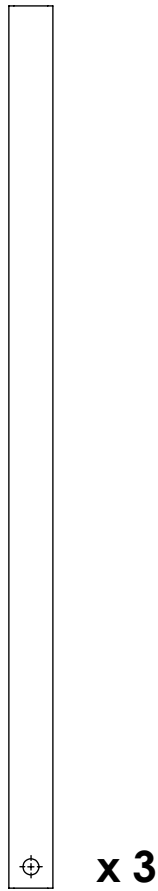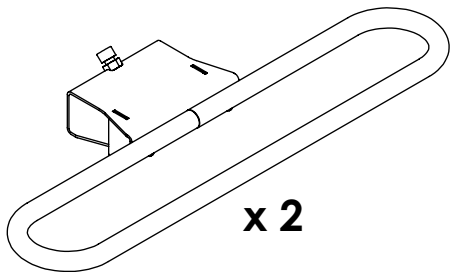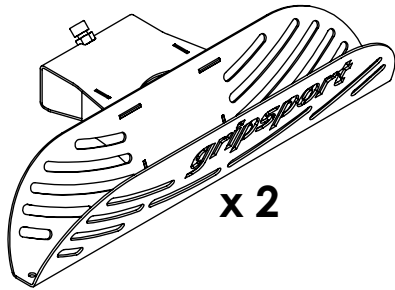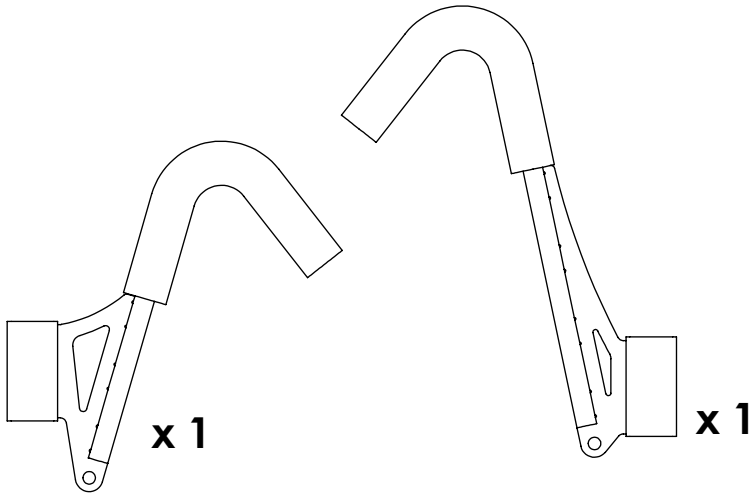


GS2+ only



Fit hitch to your tow ball tongue

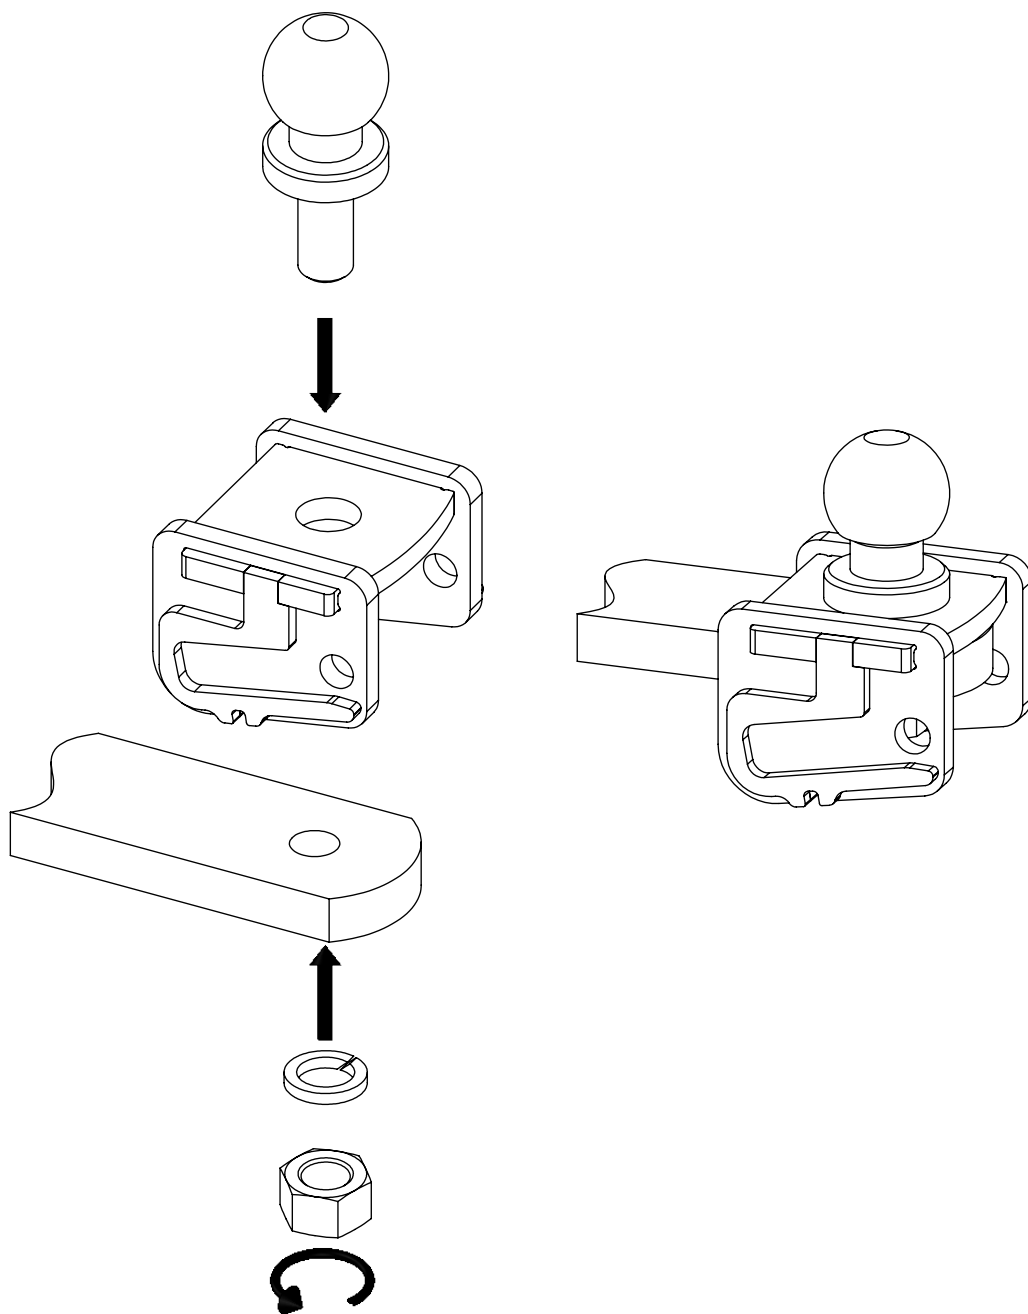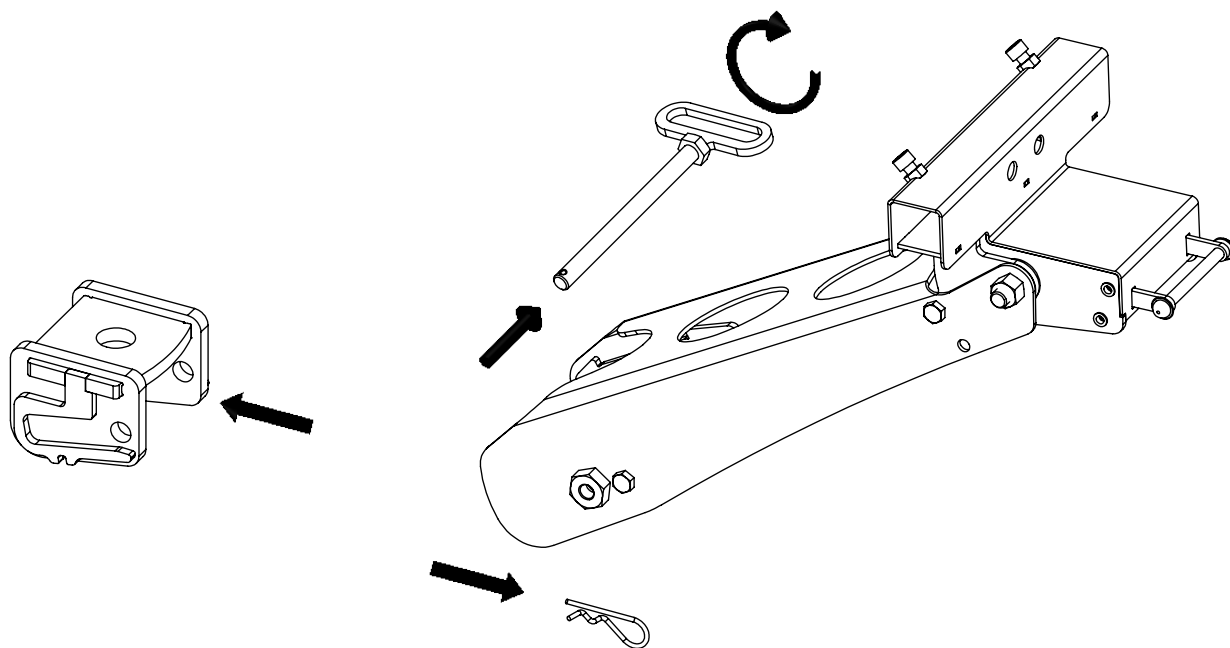


**Your carrier is supplied set at the high position.
To set at low position:**

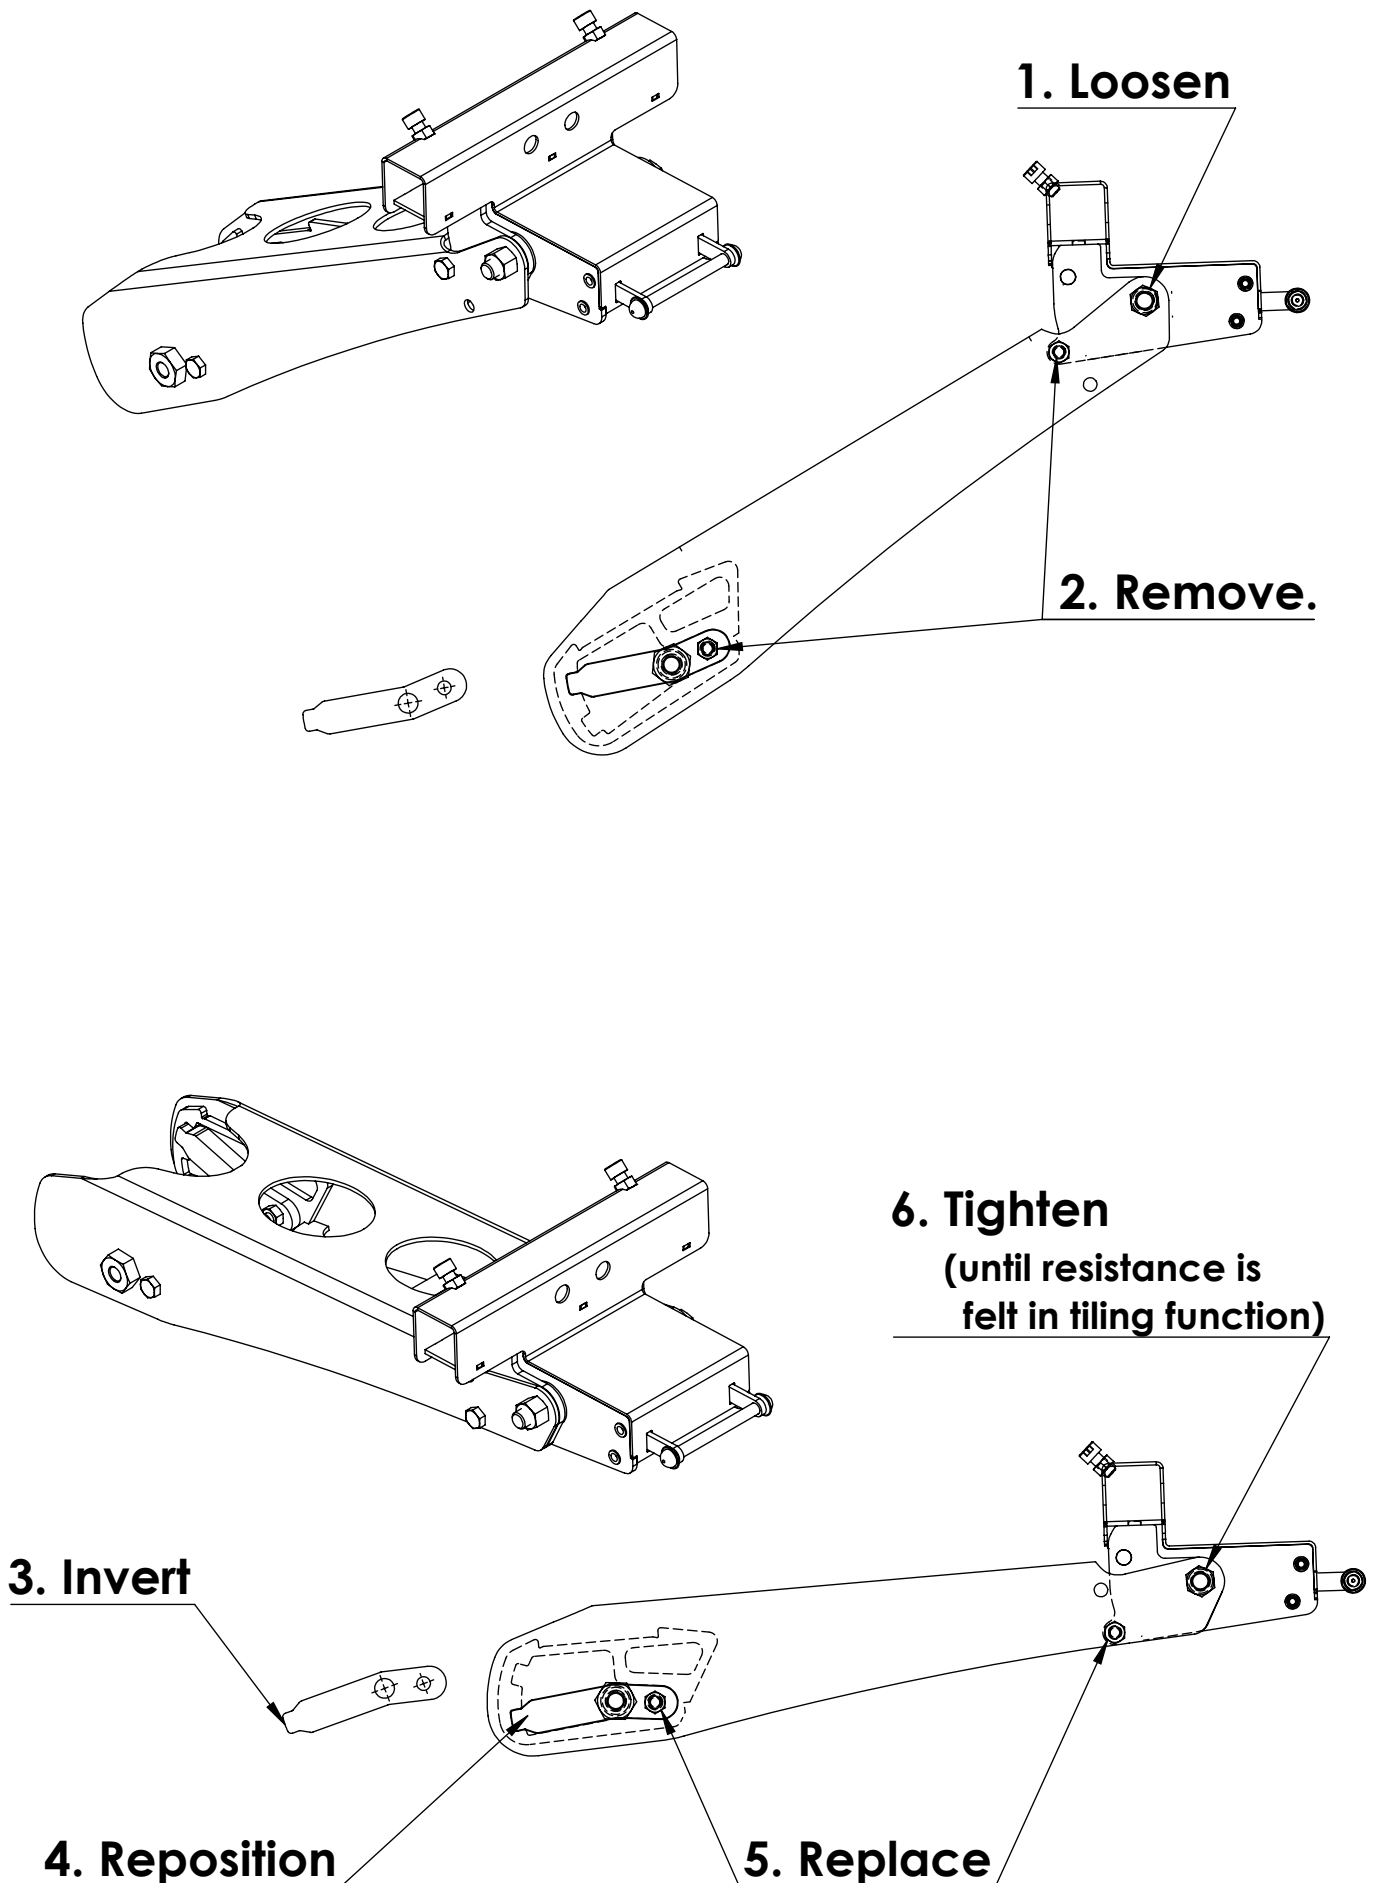



Fitting & removing rack from hitch

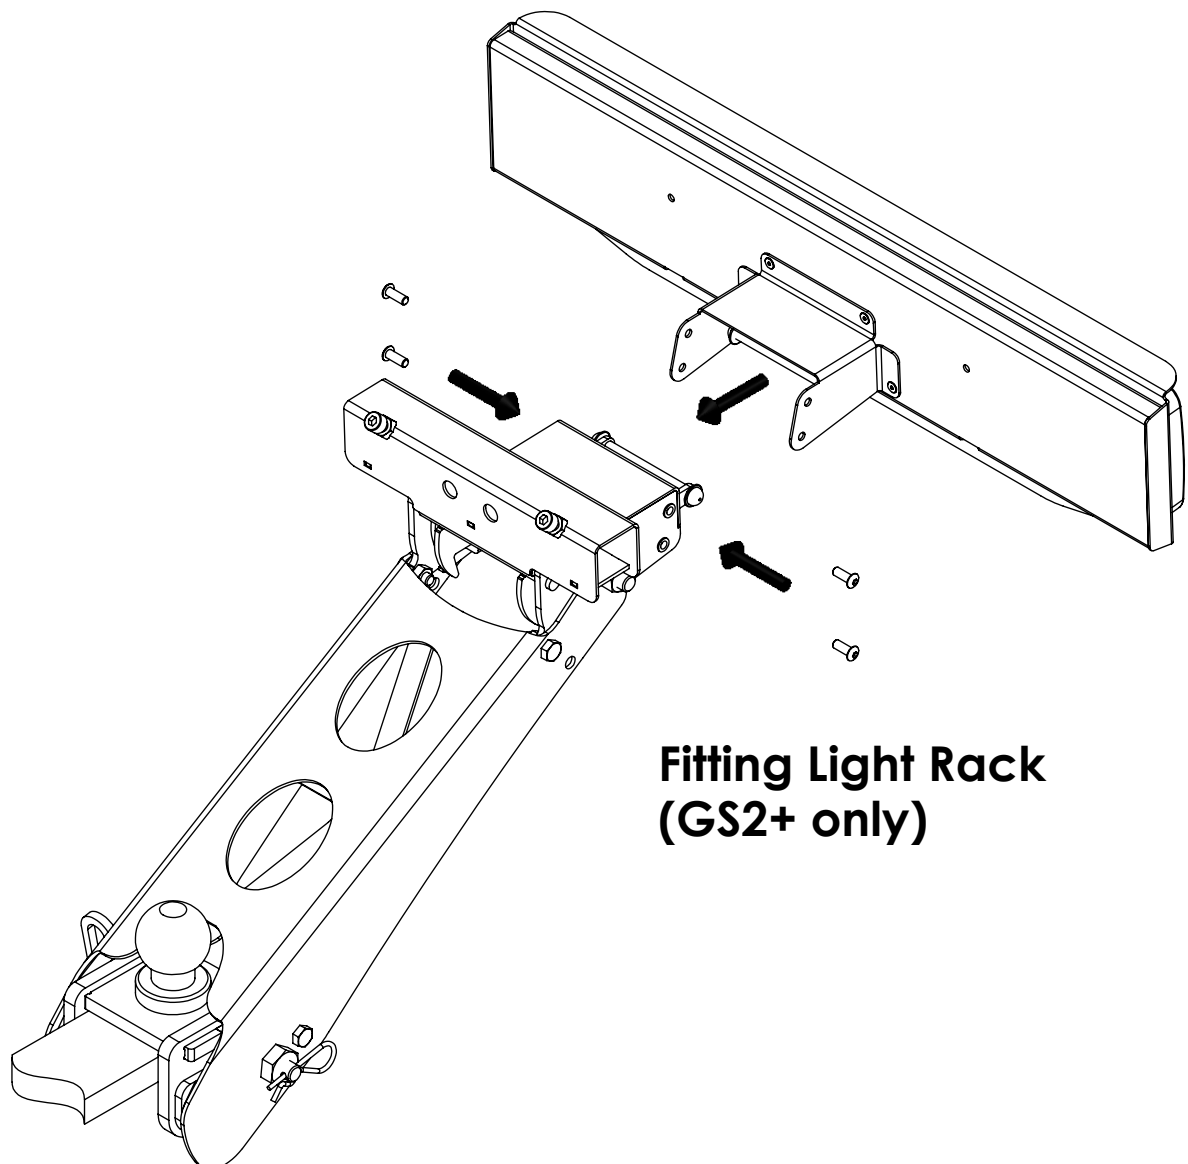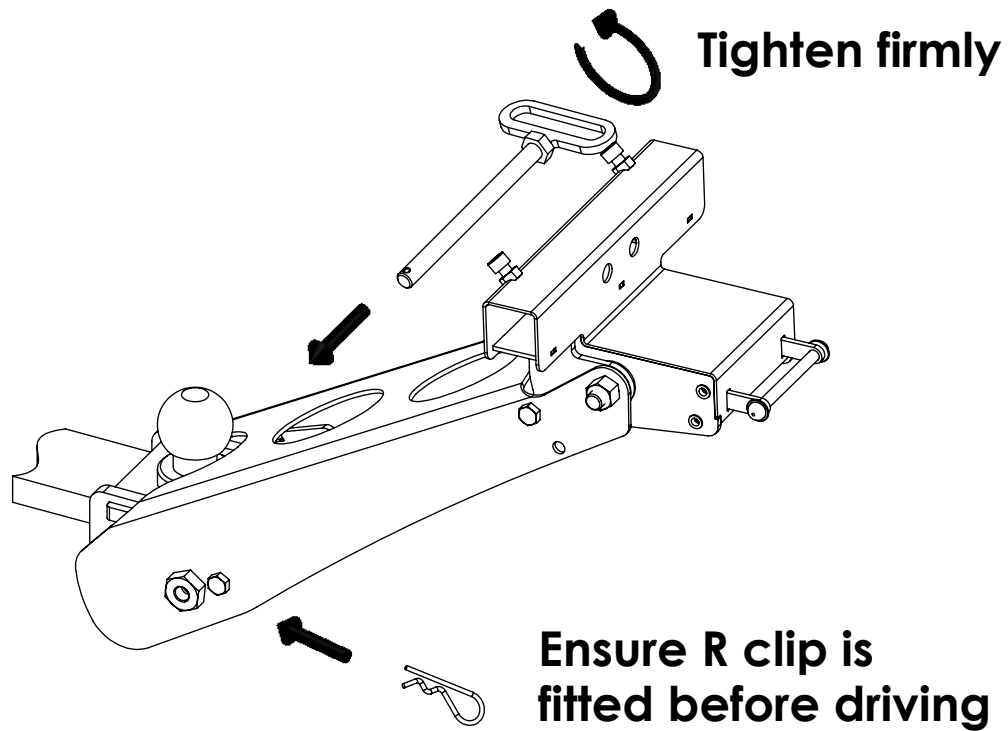


Fitting Arms

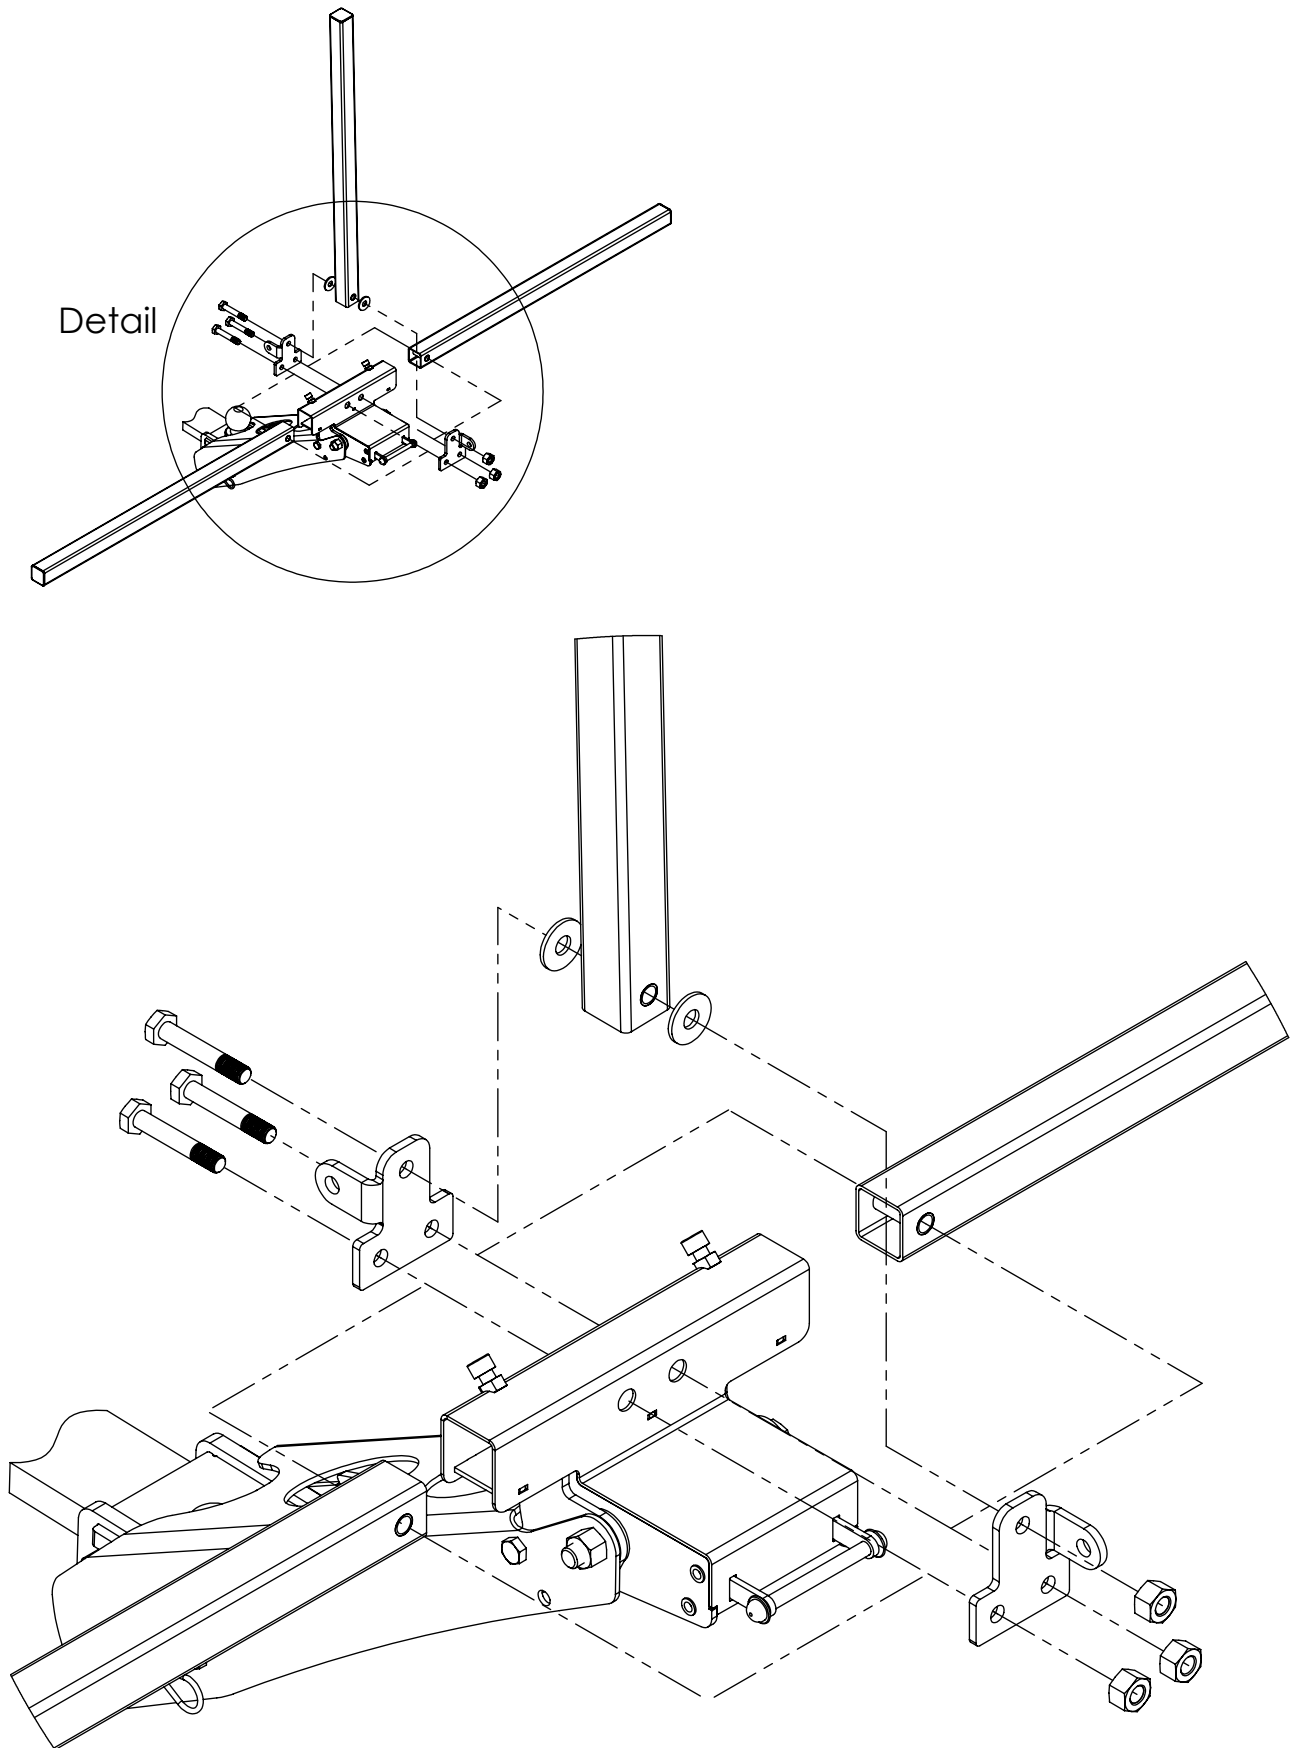

Tightening arms

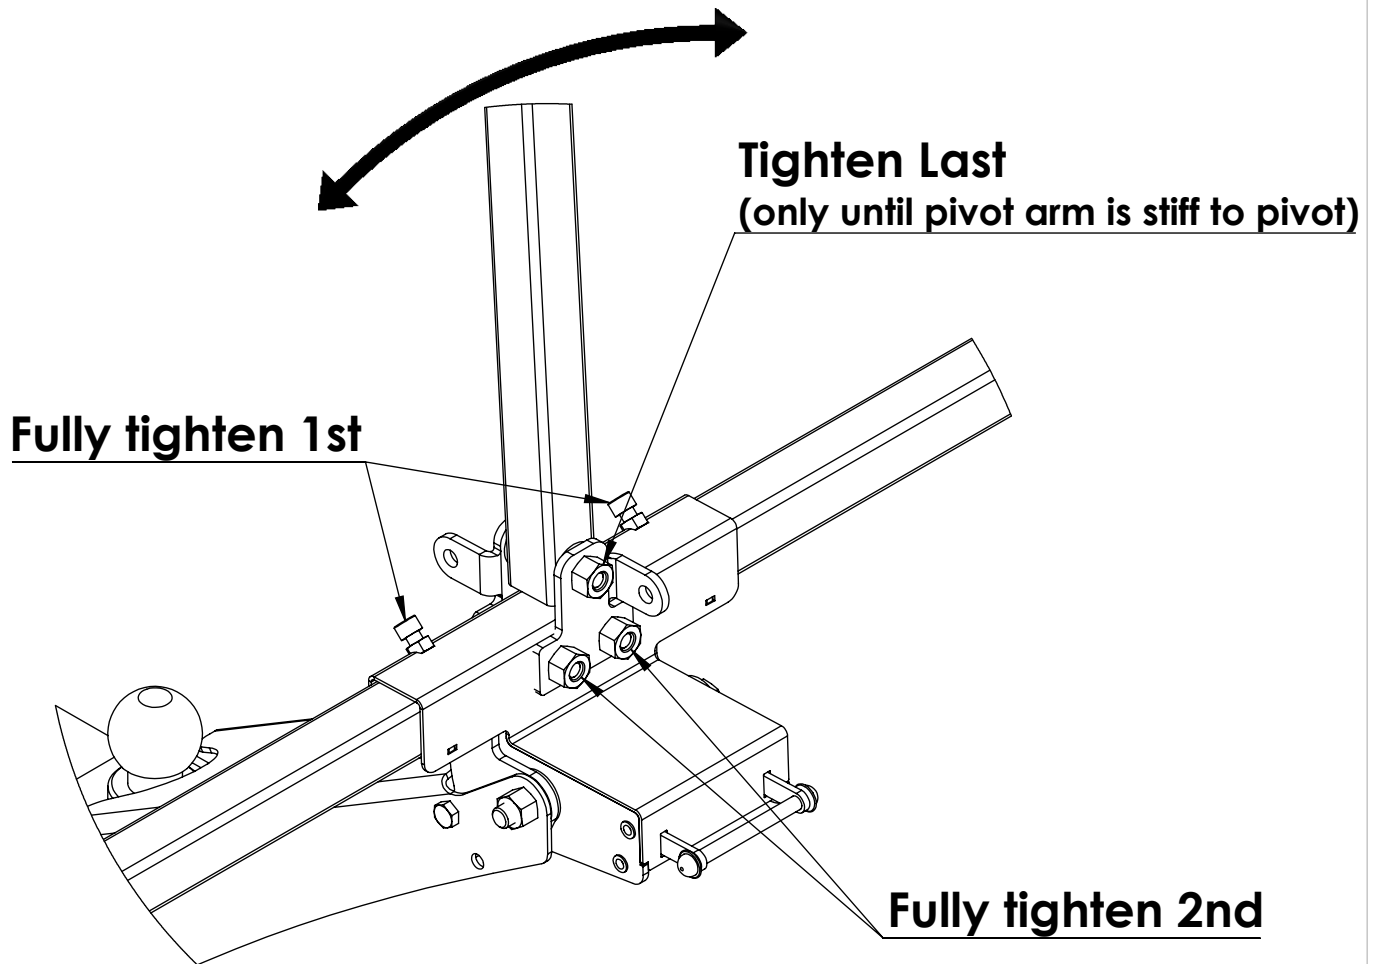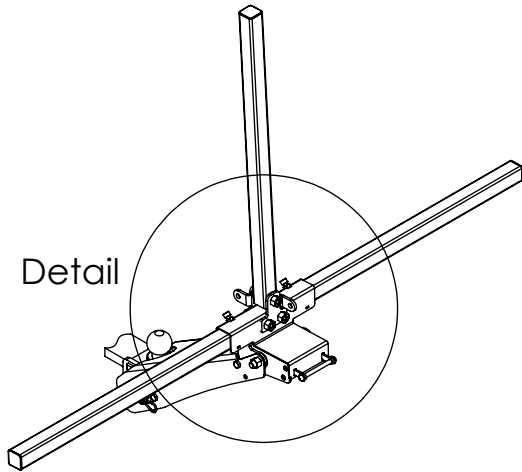

Fitting hoops & channels

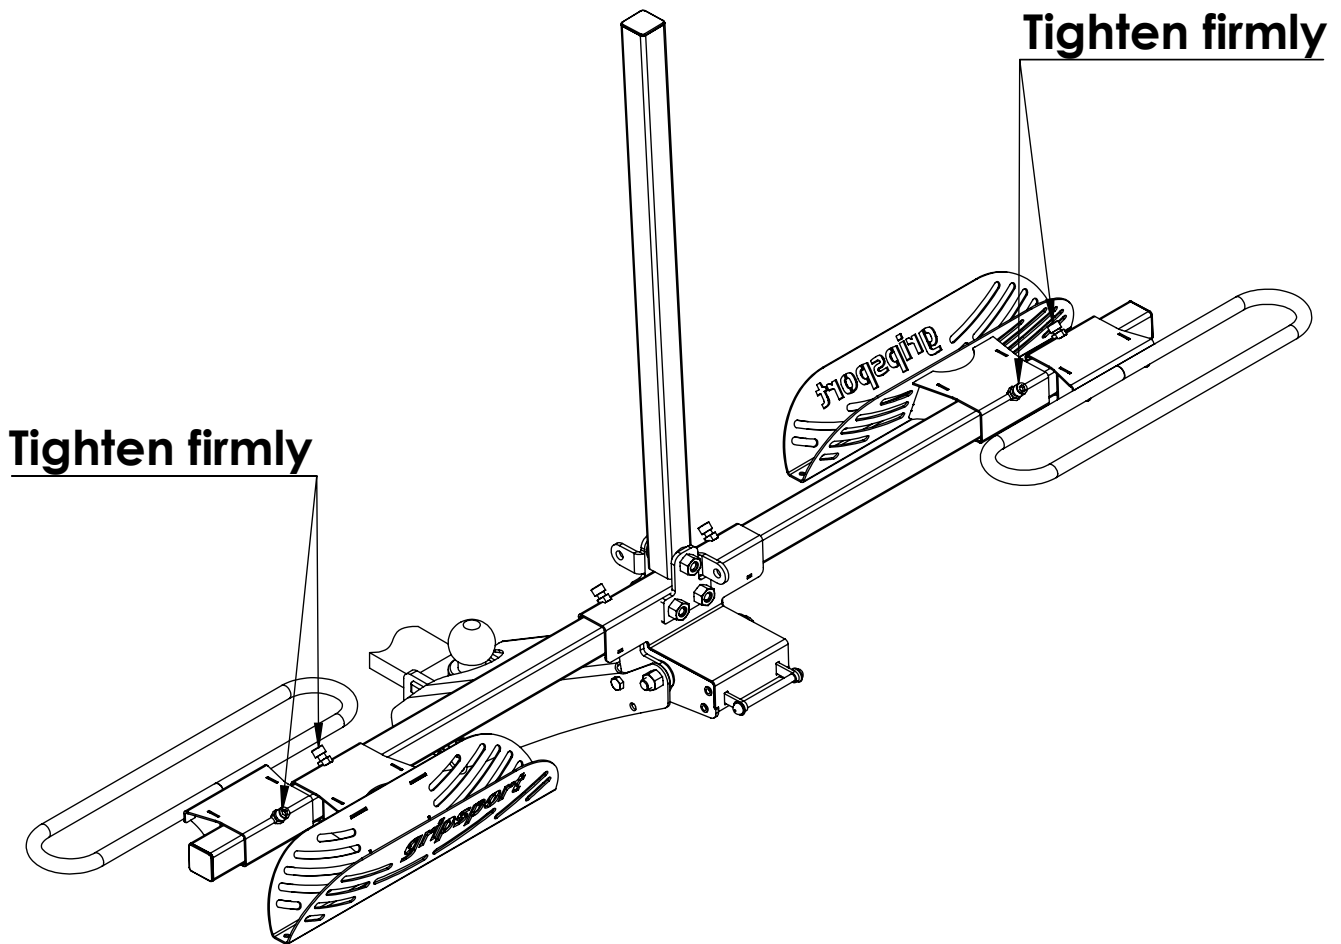


**This configuration will suit the majority of bikes.
You may wish to alter this if you need to accommodate bikes
with very different frame sizes.**


Load first bike

NOTE. If only carrying one bike
the hook must be placed at
the **LOWEST** point on the top tube


**Some step through-frames
will require a top tube adaptor**

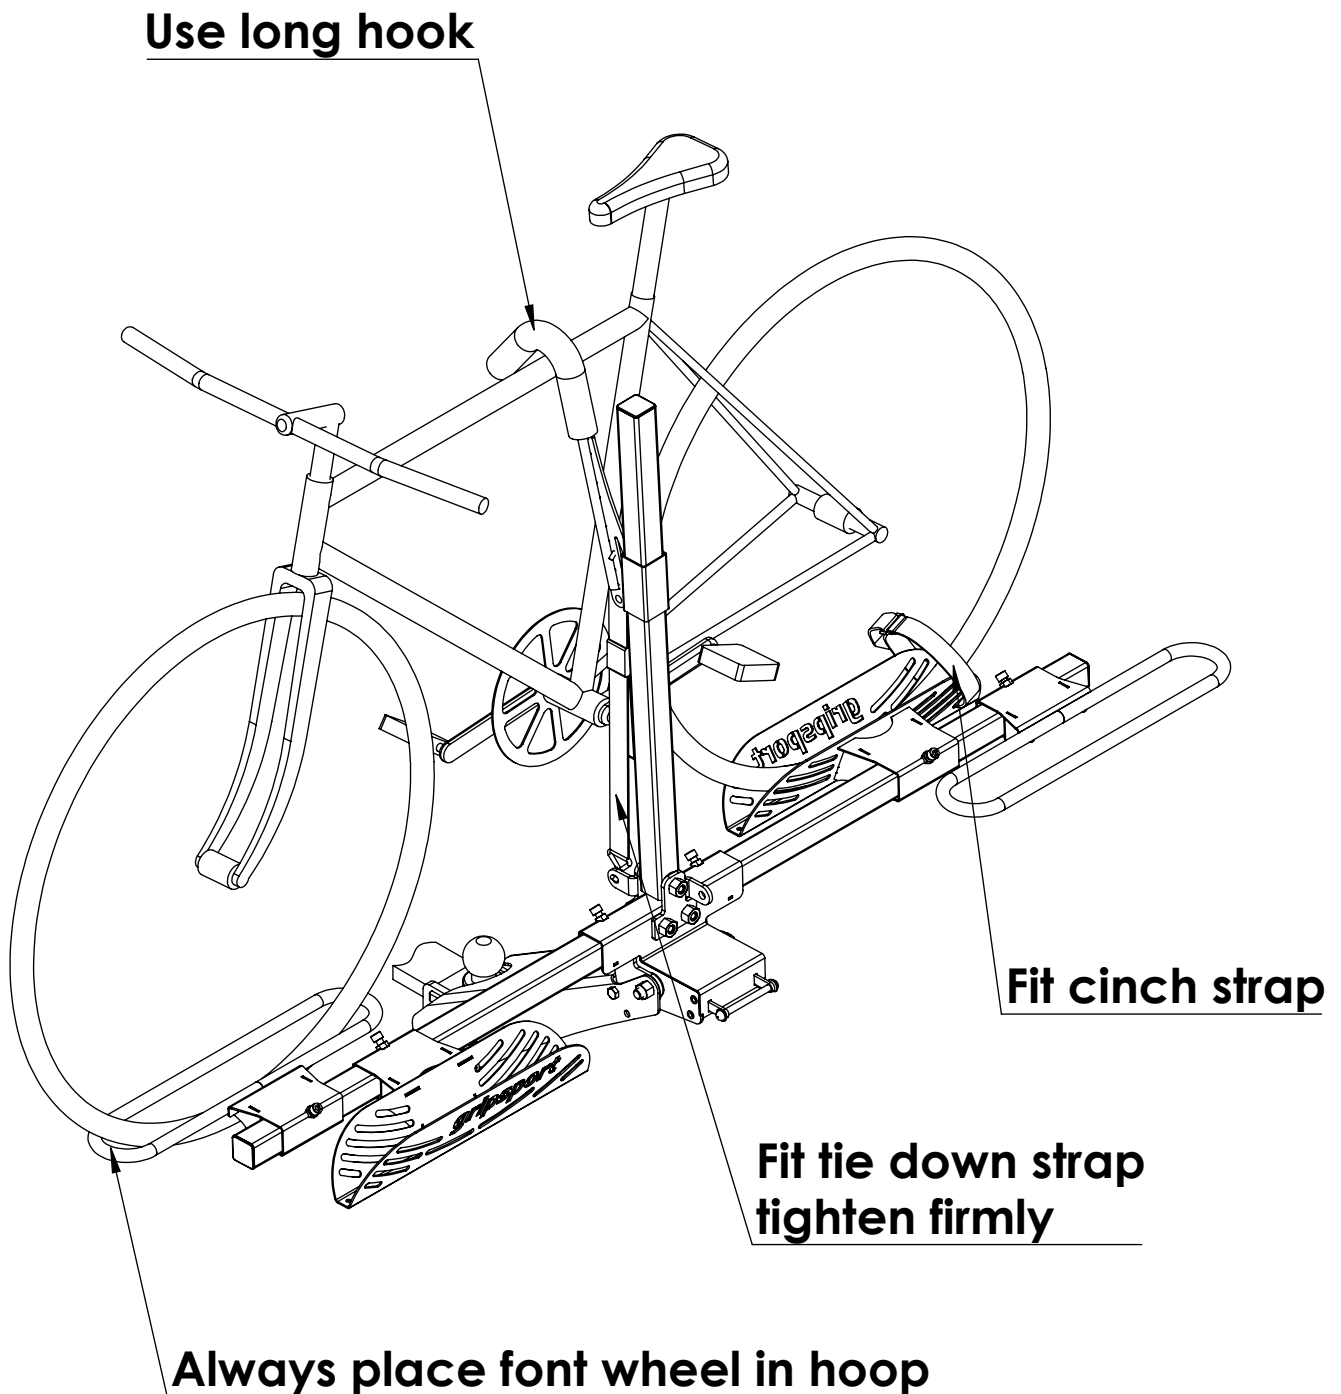

Load second bike

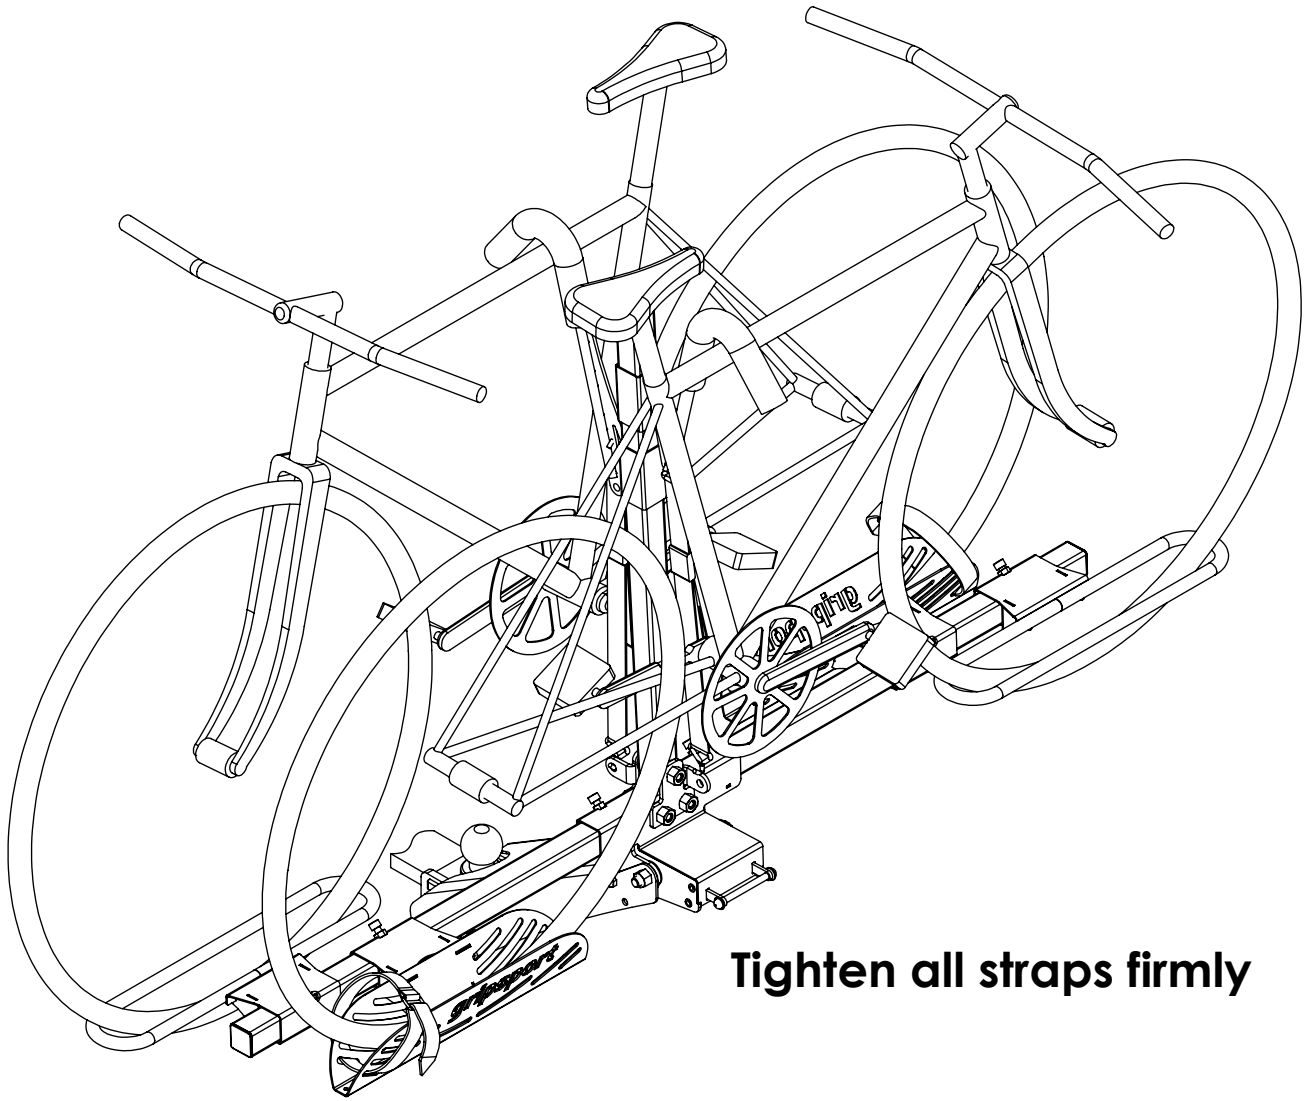


Tighten all straps firmly

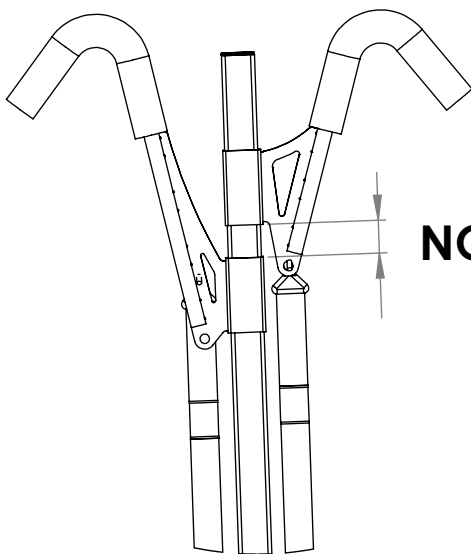

NOTE. There MUST be a gap between the hooks. Adjust position of pivoting post if necessary.

Tilt Function

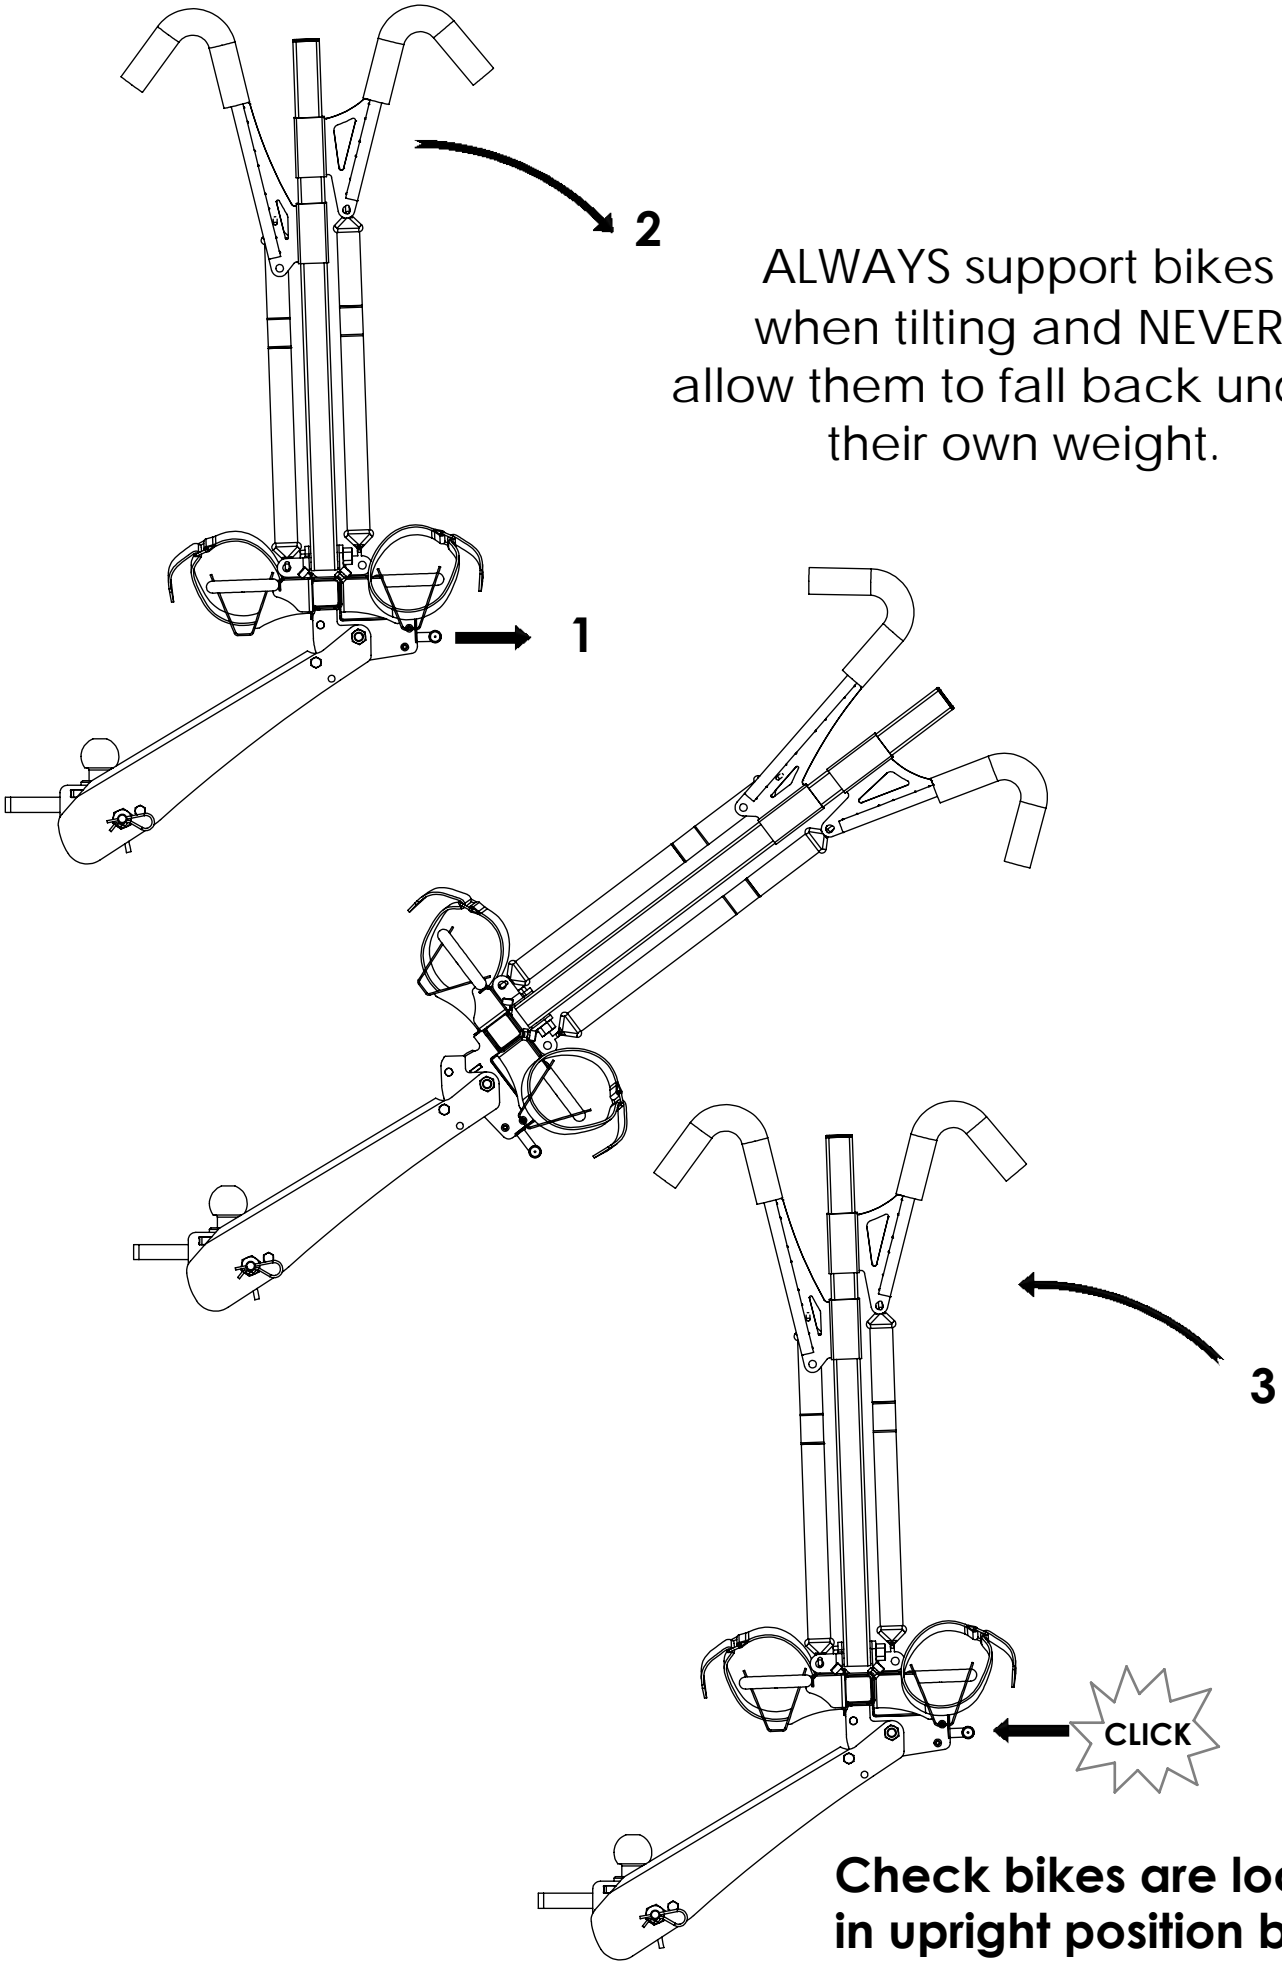

ALWAYS support bikes when tilting and NEVER allow them to fall back under their own weight.

Check bikes are locked in upright position before driving.